


Electric Strike Door Opener


Specification

Model	Size	Voltage	Current	Feature	Suitable for	Weight
ED1131NC12	160Lx25Wx31H	DC12V	12V/240mA	Fail Safe(NC)	Woodeng door Metal door	0.4 kg
ED1131NC24	160Lx25Wx31H	DC24V	24V/120mA	Fail Safe(NC)	Woodeng door Metal door	0.4 kg
ED1131NCW12	95Lx25Wx28H	DC12V	12V/240mA	Fail Safe(NC)	Woodeng door Metal door	0.4 kg
ED1131NCW24	95Lx25Wx28H	DC24V	24V/120mA	Fail Safe(NC)	Woodeng door Metal door	0.4 kg


Diagram (unit:mm)

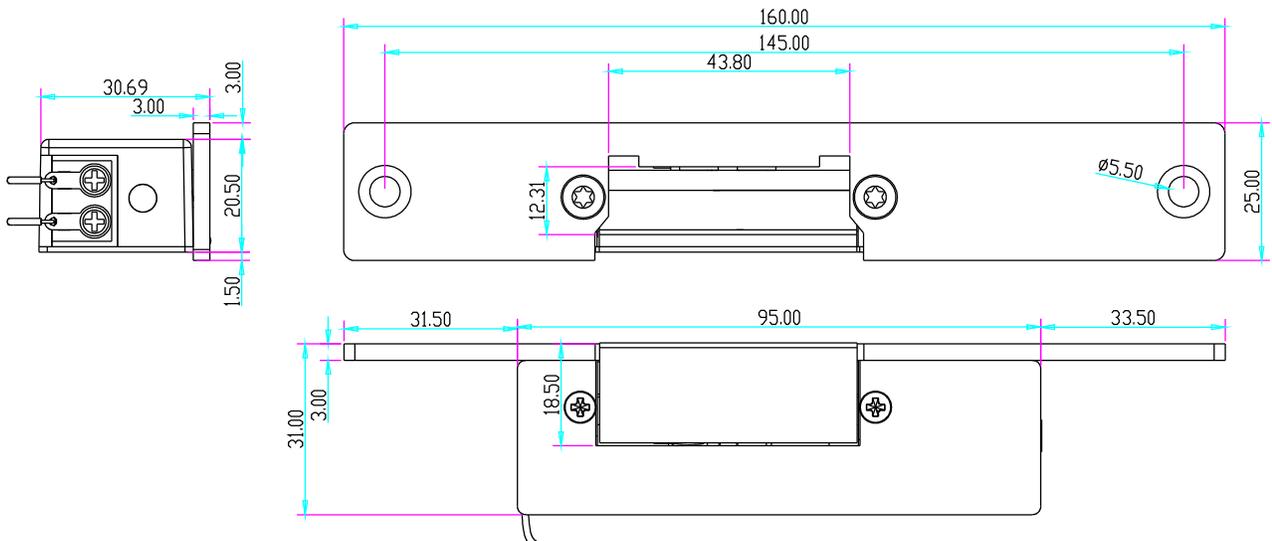


Installation

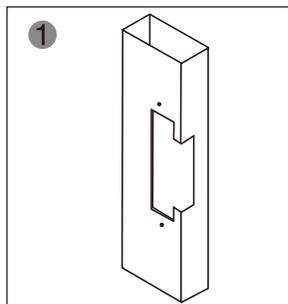


1 Cut hole according to the dimension of strike.

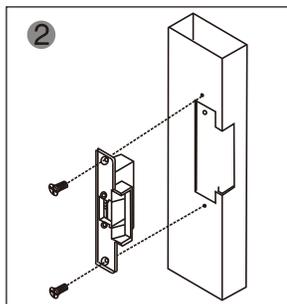

2 Assemble the lock and connect it to the power to test

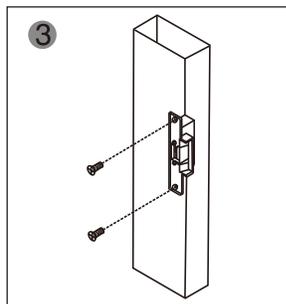


3 Fix the electric strike

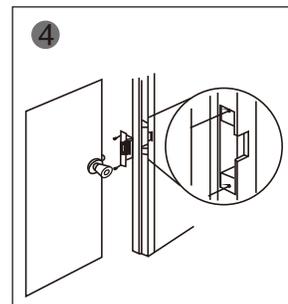


4 Finished

Suitable for

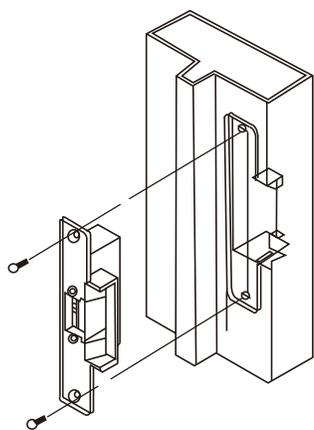


Metal Door Frame

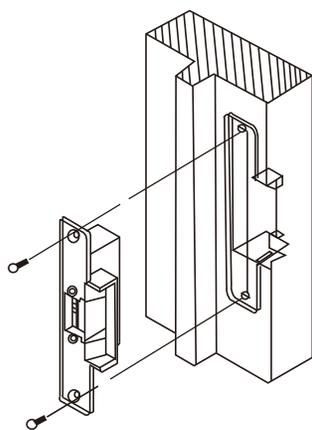

Wooden Door Frame

Installation

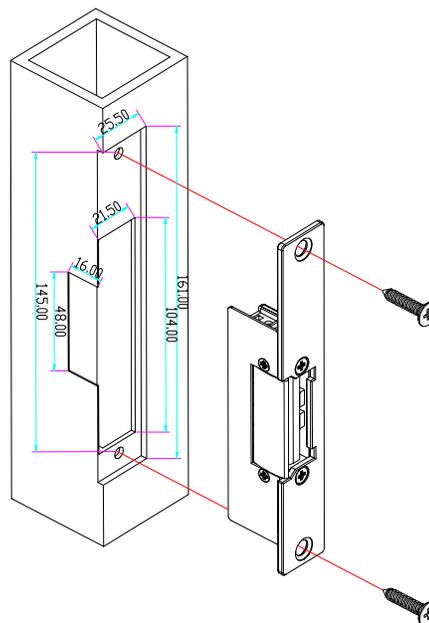

Wire connection

